



**93248C-SL
SERIES
SINGLE MODE**

**32 CHANNEL DIGITAL VIDEO SYSTEM WITH
TWO PORTS OF 10/100/1000Base-T ETHERNET**

Features:

- ◆ Compatible with NTSC, (RS – 170A & RS –343A), PAL and SECAM
- ◆ Diagnostics: Video, DC Power, Digital Frame Sync, OLI, Data Activity
- ◆ Available with Enhanced "Afinity" Intelligent Monitoring System
- ◆ 10 Bit Digital Video Transmission
- ◆ Ethernet Data Transmission

Specifications:

Video:

I/O Level1 Vp-p (±3 dB)
 I/O Impedance 75 Ohms
 Bandwidth7 MHz
 Differential Gain 2 %
 Differential Phase.....0.7 °
 SNR (Unified Weighted).....65 dB
 Connector BNC

Data (2 Ports):

Data Rate
 Auto negotiated.....10/100/1000 Mb/s
 Connector RJ45

Optical

Wavelengths1470 nm
1490 nm
1510 nm
1530 nm
1590 nm
1610 nm
 Loss Budget (9/125µ).....21 dB
 Connector SC/PC

Environmental

Operating Temp.....-40°C to +75°C
 Storage Temp.....-40°C to +85°C
 Humidity.....0% to 95% (non condensing)
 MTBF.....>100,000 hours

Power Supply:

Universal Power Input
 100 to 240 VAC, 50 to 60 Hz, 100 Watts

Size: Per End

- (6) Units of 8 Channel Video
 2 Rack Slots Each – 5 x 6½ x 2"
- (1) Ethernet Card
 1 Rack Slots Each – 5 x 6½ x 2"
- (1) 1RU 1.75" High x 19" Wide x 12" Deep
- (1) SR20/2


Ordering information:

RT-93248C-SL = Video Transmitter
 RR-93248C-SL= Video Receiver

Example:

RT-93248C-SL to RR-93248C-SL

2013_5_JPK

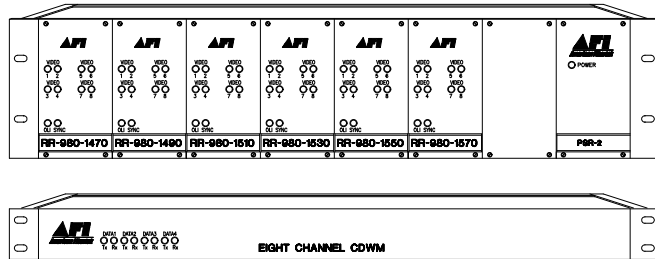

The American Fibertek 93248C-SL Series transmits 32 channels of high-quality 10 Bit digitized video and 2 ports of triple speed 10/100/1000Base-T on one singlemode optical fiber using CWDM technology.

Designed to be completely transparent to all camera and monitor manufacturers, this system requires no field adjustments at installation or additional maintenance thereafter. Diagnostic indicators provide a quick visual indication of system status.

The "Afinity" intelligent remote monitoring system is available on this product, please consult factory.

Equipment consists of an American Fibertek Card Cage, SR-20/2 sub-rack containing four (8 channel video) rack cards (2 slots each), one Ethernet rack card (1 slot) and a 1RU rack unit which contains the CWDM passive optics. Also available in card cages (SR-20H/2) with redundant power supplies. Consult factory for more details

