


**NOTES:**


1. RECOMMENDED AUDIO INPUT/OUTPUT LEVELS ARE +15 dBm @ 600 OHMS.
2. THE MODULE MAY ALSO BE POWERED FROM +24 VDC. THE POSITIVE +24 VDC CONNECTION MAY BE MADE TO EITHER PORT OF THE INPUT POWER TERMINAL BLOCK.

OLI – OPTICAL LEVEL INDICATOR:  
INDICATOR IS GREEN WHEN PROPER LEVEL IS PRESENT. IT IS RED WHEN SIGNAL IS MISSING OR AT INCORRECT LEVEL.

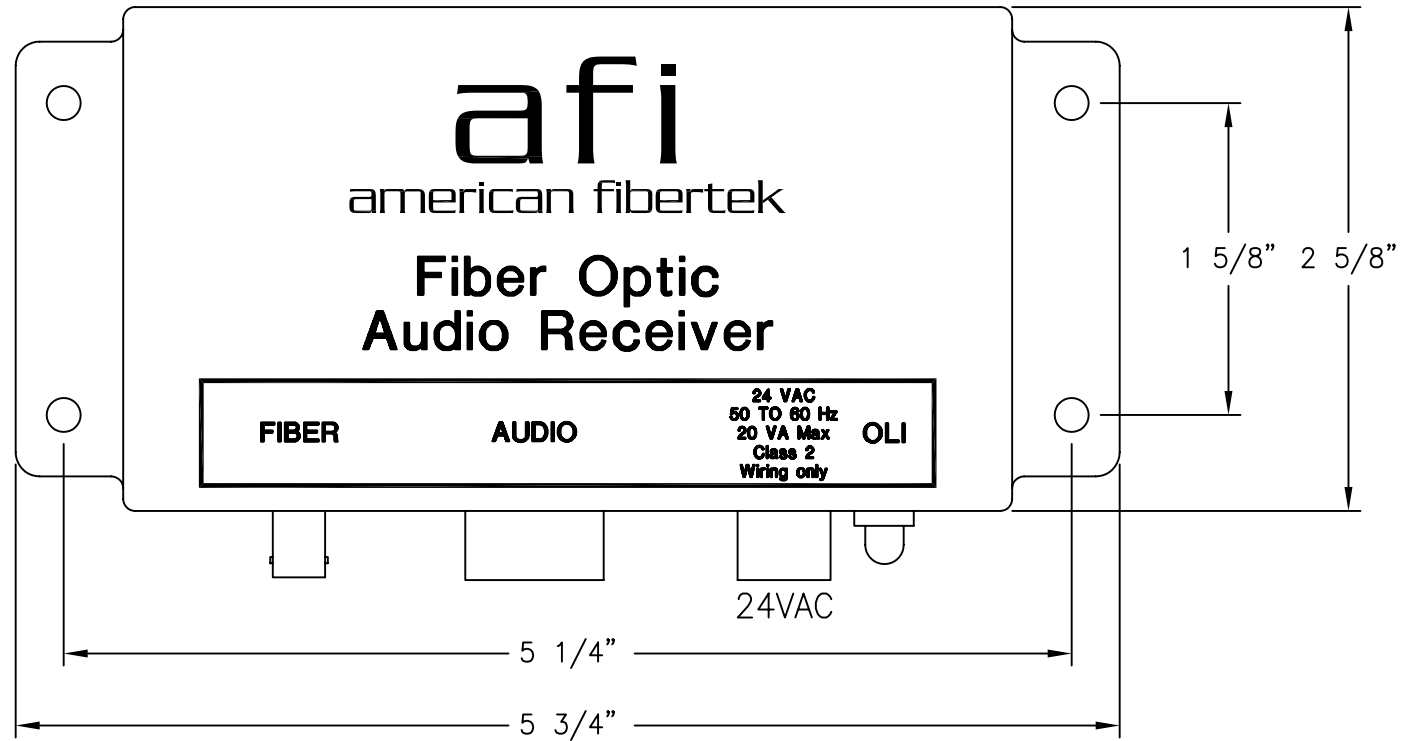

AUDIO INPUT

PIN #	BALANCED	UNBALANCED
1	AUDIO +	AUDIO
2	GROUND	GROUND
3	AUDIO -	N.C.

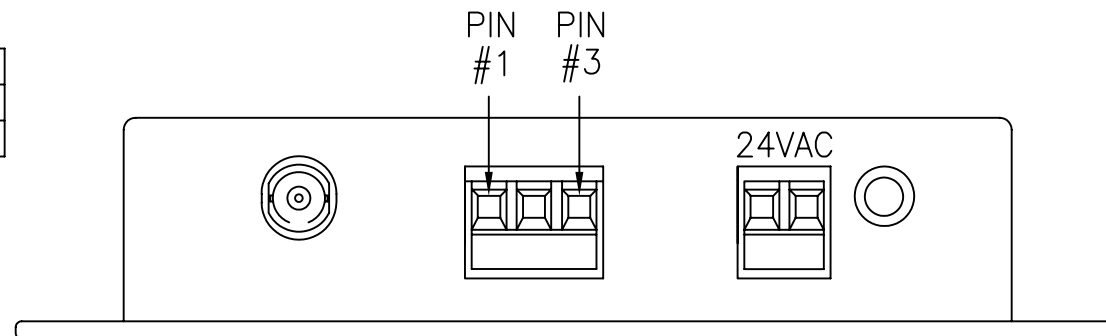

MOUNTING DIMENSIONS  
1 5/8" x 5 1/4" O.C.

 <b>afi</b> american fibertek 120 BELMONT DRIVE SOMERSET N.J.	DATE: 08 NOV 07	MR-05B-239			
	ACAD FN.: MR-05B-239 CC	CUSTOMER ASSEMBLY DRAWING			
	SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. 1 OF 1	REV.: