



**NOTES:**

1. RECOMMENDED AUDIO INPUT/OUTPUT LEVELS ARE +15 dBm @ 600 OHMS.
2. THE MODULE MAY ALSO BE POWERED FROM +24 VDC. THE POSITIVE +24 VDC CONNECTION MAY BE MADE TO EITHER PORT OF THE INPUT POWER TERMINAL BLOCK.

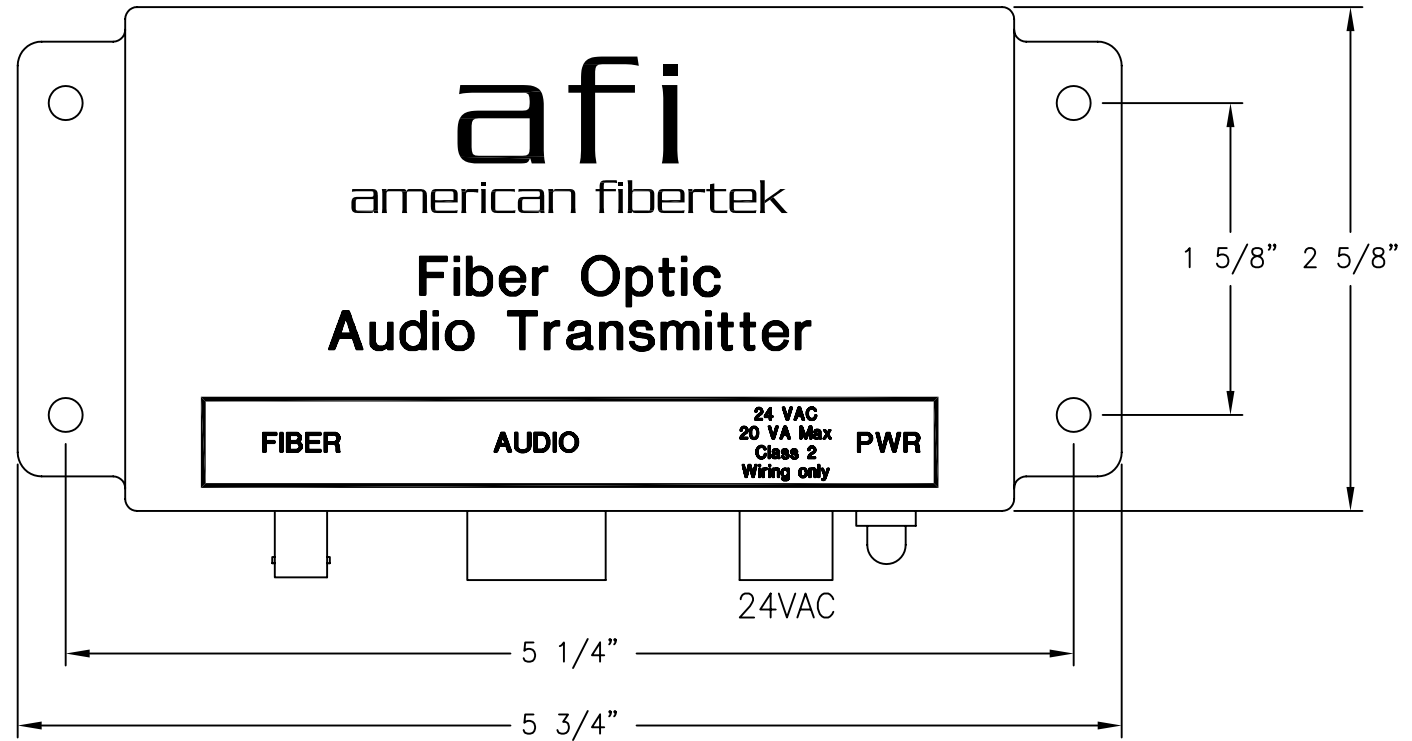

AUDIO INPUT (MT)

PIN #	BALANCED	UNBALANCED
1	AUDIO +	AUDIO
2	GROUND	GROUND
3	AUDIO -	N.C.

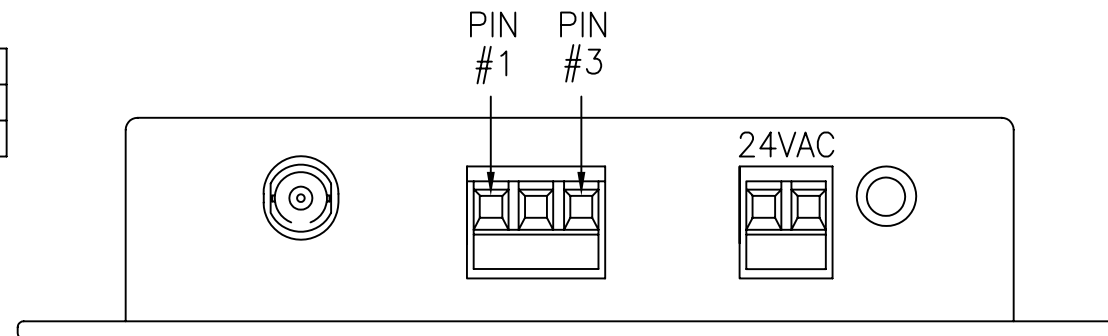

MOUNTING DIMENSIONS  
1 5/8" x 5 1/4" O.C.

<p>afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.</p>	DATE: 07 SEPT 07	MT-05B-S-239		
	ACAD FN.: MT-05B-S-239 CC	CUSTOMER ASSEMBLY DRAWING		
SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. 1 OF 1	REV.: CHK.: SK