

afi
american fibertek

**FIBER OPTIC
TRANSCEIVER**

OPTICAL VLI IN DATA I/O OUT OLI



24 VAC
50 TO 60 Hz
20 VA Max
Class 2 Wiring only

3 1/4" 5 3/4"

6 1/4"

6 3/4"

OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

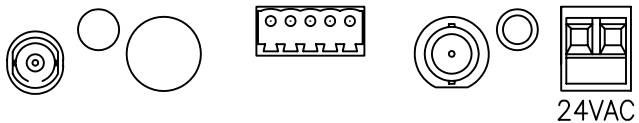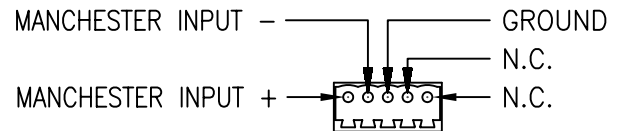

1 3/8"

24VAC

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

afi

american fibertek

120 BELMONT DRIVE SOMERSET N.J.

DATE: 12 JAN 08

ACAD FN.: MR-1200B CC

SCALE: 1:.075

DWG BY: BLB

MR-1200B
CUSTOMER ASSEMBLY DRAWING

DWG. NO.:

SH. 1 OF 1

REV.:

CHK.: