

afi
american fibertek

**FIBER OPTIC
TRANSCEIVER**

OPTICAL VLI IN DATA I/O OUT OLI



24 VAC
50 TO 60 Hz
20 VA Max
Class 2 Wiring only

3 1/4" 5 3/4"

6 1/4"

6 3/4"

OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

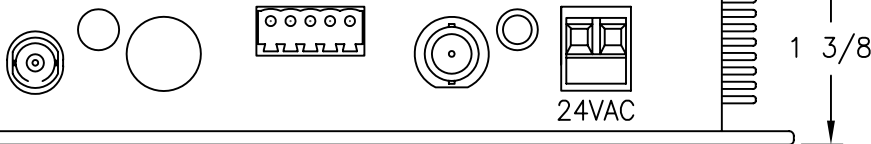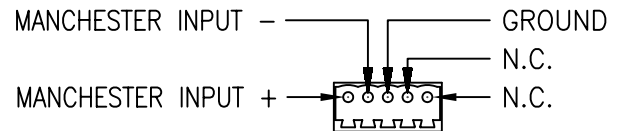

24VAC

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

<p>afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.</p>	DATE:	12 JAN 08	<p>MR-1200B-EL CUSTOMER ASSEMBLY DRAWING</p>			
	ACAD FN.:	MR-1200B-EL CC				
	SCALE:	DWG BY:	DWG. NO.:	REV.:	CHK.:	
	1:.075	BLB			SH. 1 OF 1	