

afi
american fibertek

**FIBER OPTIC
TRANSCEIVER**



OPTICAL VLI IN DATA I/O OUT OLI 24 VAC 50 TO 60 Hz 20 VA Max Class 2 Wiring only

3 1/4" 5 3/4"

6 1/4"

6 3/4"

OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

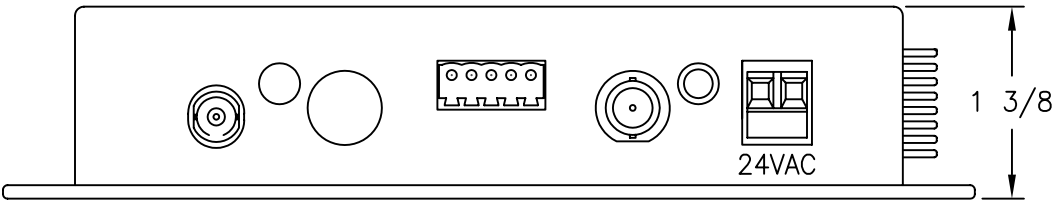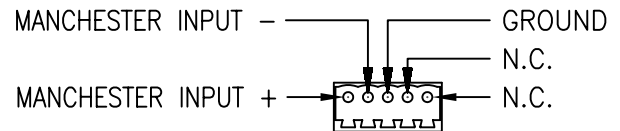

1 3/8"

24VAC

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

<p>afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.</p>	DATE: 12 JAN 08		<p>MR-1200B-EL CUSTOMER ASSEMBLY DRAWING</p>		
	ACAD FN.: MR-1200B-EL CC				
	SCALE: 1:.075	DWG BY: BLB	DWG. NO.:	SH. 1 OF 1	REV.: