

**afi**  
american fibertek

**FIBER OPTIC  
TRANSCEIVER**

OPTICAL VLI IN DATA I/O OUT OLI


24 VAC  
50 TO 60 Hz  
20 VA Max  
Class 2 Wiring only

3 1/4" 5 3/4"

6 1/4"

6 3/4"

OLI - OPTICAL LEVEL INDICATOR:  
INDICATOR IS GREEN WHEN PROPER  
LEVEL IS PRESENT. IT IS RED WHEN  
SIGNAL IS MISSING OR AT INCORRECT  
LEVEL.

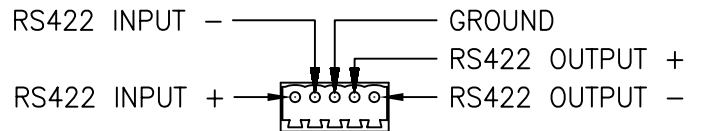

1 3/8"

24VAC

24VAC

NOTE:  
MOUNTING DIMENSIONS  
3 1/4" x 6 1/4" O.C.

**afi**  
american fibertek

120 BELMONT DRIVE SOMERSET N.J.

DATE: 27 APR 10

ACAD FN.:  
MR-1400-184 CC

SCALE:  
1:.075

DWG BY:  
BLB

MR-1400-184  
CUSTOMER ASSEMBLY DRAWING

DWG. NO.:

SH. 1 OF 1

REV.:

CHK.: