

afi
american fibertek

**FIBER OPTIC
TRANSCEIVER**

OPTICAL VLI IN DATA I/O OUT OLI


24 VAC
50 TO 60 Hz
20 VA Max
Class 2 Wiring only

3 1/4" 5 3/4"

6 1/4"

6 3/4"

OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

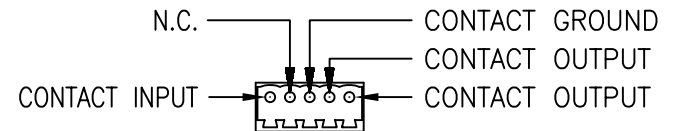

1 3/8"

24VAC

24VAC

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

<p>afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.</p>	DATE:	17 MAR 08	<p>MR-1900 CUSTOMER ASSEMBLY DRAWING</p>		
	ACAD FN.:	MR-1900 CC			
	SCALE:	DWG BY:	DWG. NO.:	REV.:	CHK.:
	1:.075	BLB		SH. 1 OF 1	<i>SK</i>