


4.650

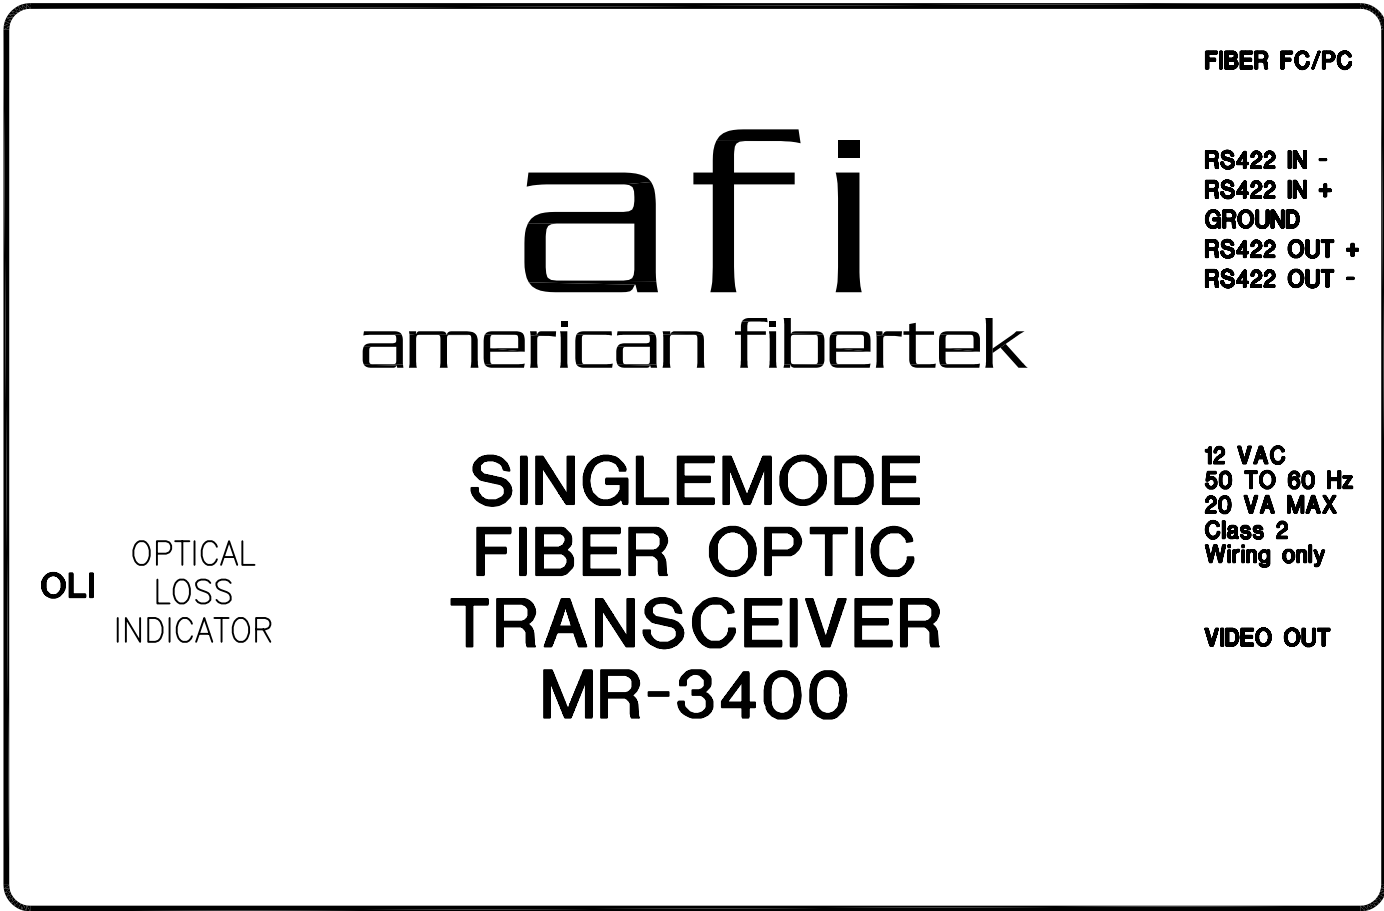

a fi
american fibertek

**SINGLEMODE
FIBER OPTIC
TRANSCEIVER
MR-3400**

OLI OPTICAL
LOSS
INDICATOR

FIBER FC/PC

**RS422 IN -
RS422 IN +
GROUND
RS422 OUT +
RS422 OUT -**


**12 VAC
50 TO 60 Hz
20 VA MAX
Class 2
Wiring only**

VIDEO OUT

NOT
USED

8.400

OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER LEVEL IS PRESENT.
IT IS RED WHEN SIGNAL IS MISSING OR AT AN INCORRECT
LEVEL.

 afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.	DATE: 09 OCT 07		MR-3400		
	ACAD FN.: MR-3400 CC		CUSTOMER ASSEMBLY DRAWING		
	SCALE: none	DWG BY: BLB	DWG. NO.:	SH. OF	REV.: