


OLI – OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

DATA RX/TX:
INDICATORS ARE GREEN AND INDICATE
DATA ACTIVITY. INDICATORS ARE OFF
WHEN NO ACTIVITY IS PRESENT.

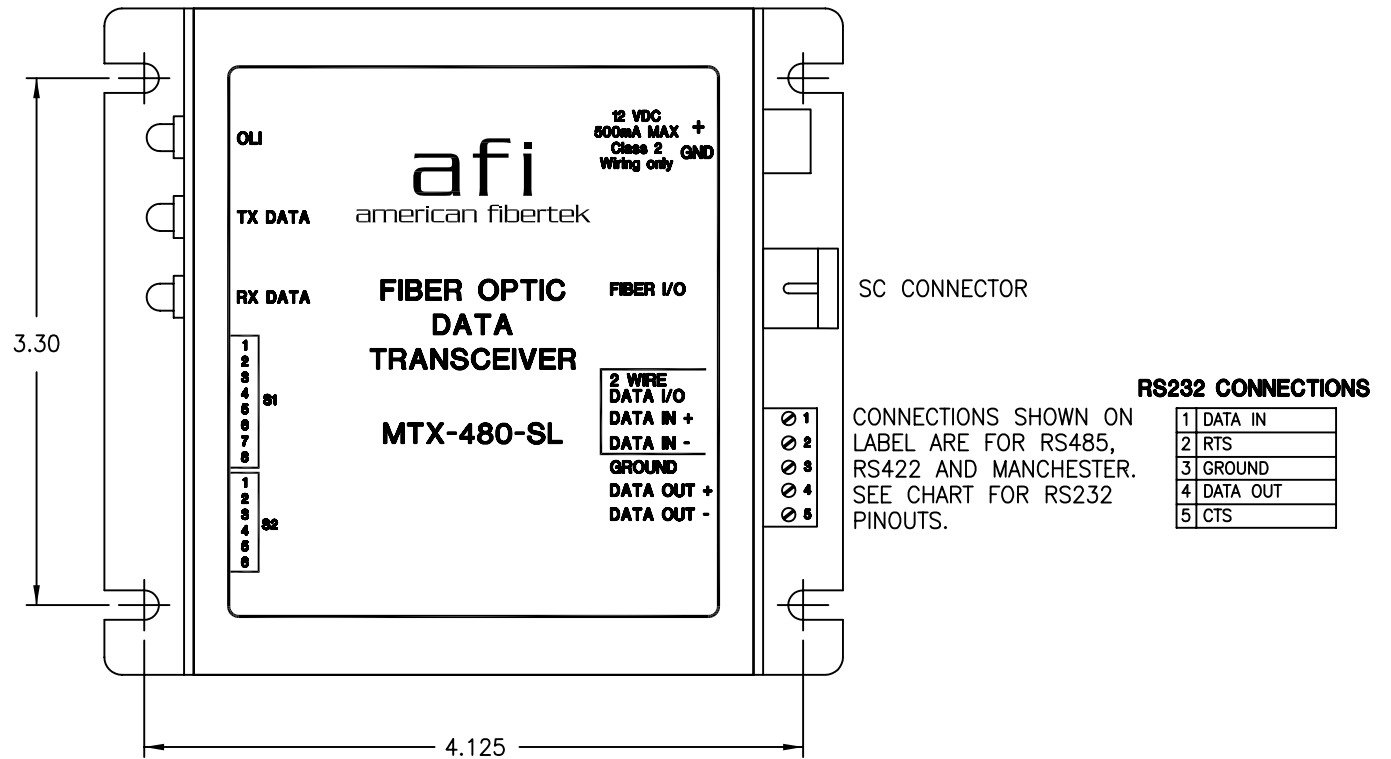

SWITCH S1 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	RS485-4W (FACTORY SHIPPED)
OFF	OFF	ON	OFF	OFF	OFF	ON	ON	RS485-2W
OFF	ON	OFF	OFF	OFF	OFF	ON	ON	RS422/MANCHESTER
ON	OFF	OFF	OFF	ON	ON	OFF	OFF	RS232

SWITCH S2 LEGEND			
	ON=DOWN	OFF=UP	FACTORY SHIPPED
1	INPUT BIAS ON	INPUT BIAS OFF	OFF
2	INPUT TERM. ON	INPUT TERM. OFF	OFF
3	INPUT BIAS ON	INPUT BIAS OFF	OFF
4	OUTPUT BIAS ON	OUTPUT BIAS OFF	OFF
5	OUTPUT TERM. ON	OUTPUT TERM. OFF	OFF
6	OUTPUT BIAS ON	OUTPUT BIAS OFF	OFF

 120 BELMONT DRIVE SOMERSET N.J.	DATE: 13 DEC 07		MTX-480-SL CUSTOMER CONNECTION			
	ACAD FN: MTX-480-SL CC					
	SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. OF	REV.:	CHK.: <i>SK</i>