



OLI – OPTICAL LEVEL INDICATOR:
 INDICATOR IS GREEN WHEN PROPER
 LEVEL IS PRESENT. IT IS RED WHEN
 SIGNAL IS MISSING OR AT INCORRECT
 LEVEL.

DATA RX/TX:
 INDICATORS ARE GREEN AND INDICATE
 DATA ACTIVITY. INDICATORS ARE OFF
 WHEN NO ACTIVITY IS PRESENT.

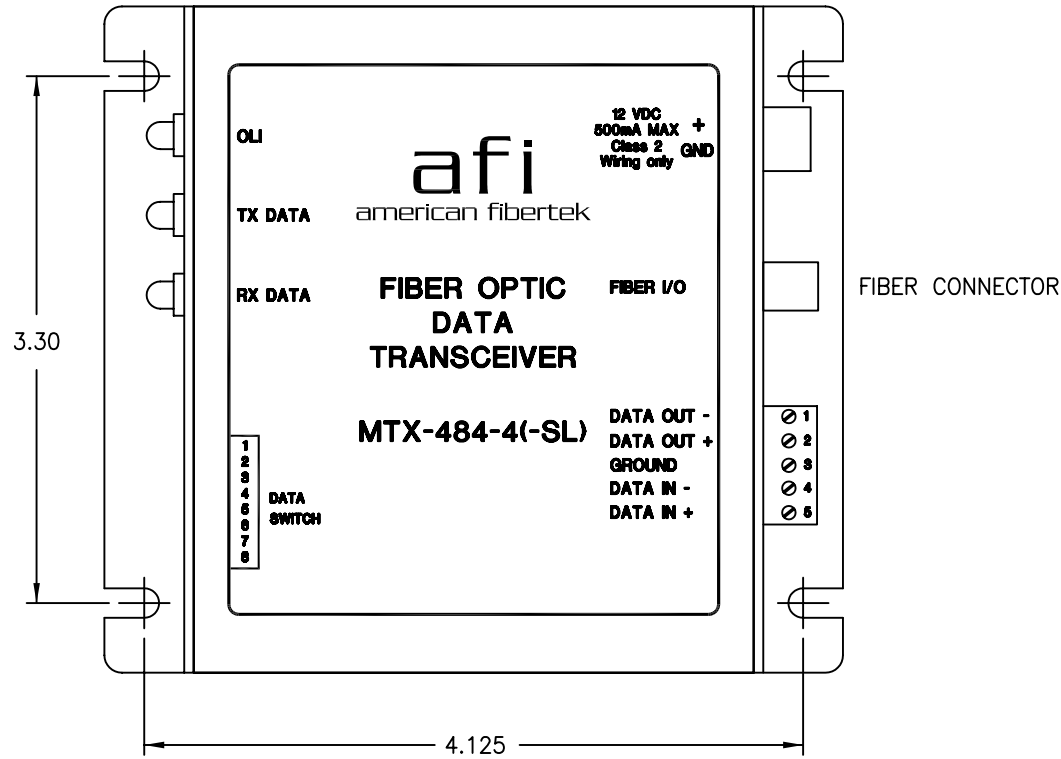

SWITCH S1 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	RS485-4W / RS422

 afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.	DATE: 16 APR 12		MTX-484-4(-SL) CUSTOMER CONNECTION			
	ACAD FN: MTX-484(-SL) CC					
	SCALE: NONE	DWG BY: CLQ	DWG. NO.:	SH. OF	REV.:	CHK.: <i>SK</i>