


OLI – OPTICAL LEVEL INDICATOR:  
 INDICATOR IS GREEN WHEN PROPER  
 LEVEL IS PRESENT. IT IS RED WHEN  
 SIGNAL IS MISSING OR AT INCORRECT  
 LEVEL.

CONTACT RX/TX:  
 INDICATORS ARE GREEN WHEN CONTACTS  
 ARE CLOSED, OFF WHEN CONTACTS ARE  
 OPEN.

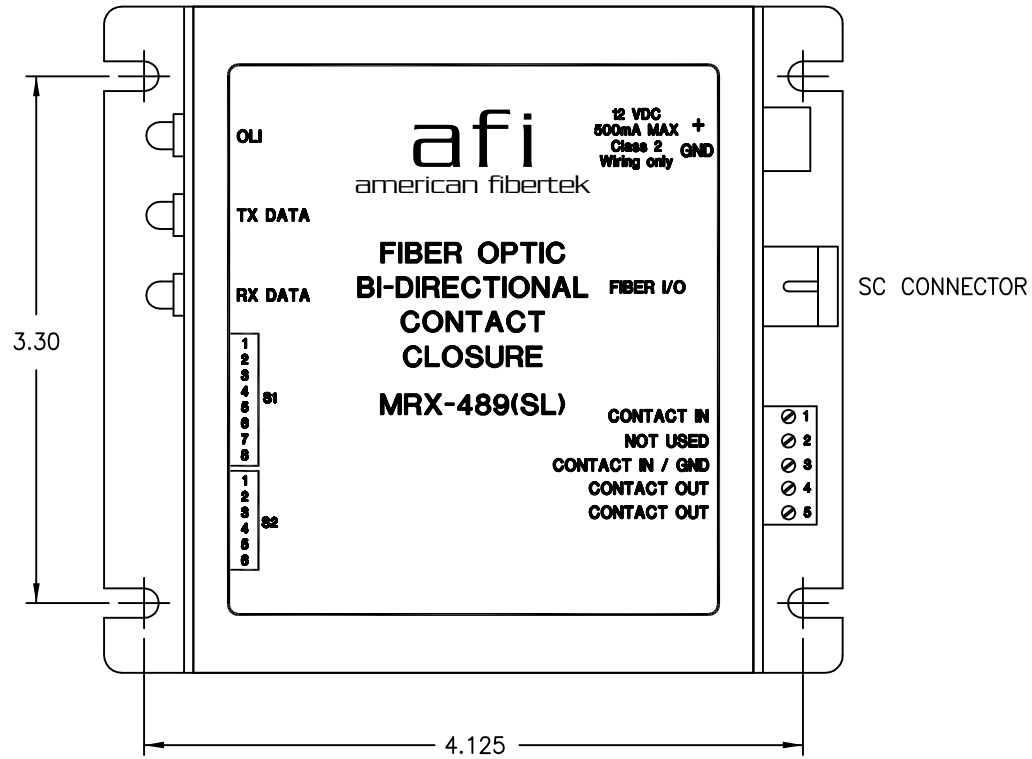

SWITCH S1 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
<b>ON</b>	<b>OFF</b>	<b>ON</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>ON</b>	<b>ON</b>	<b>FACTORY SHIPPED</b>

SWITCH S2 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>OFF</b>	<b>FACTORY SHIPPED</b>

 120 BELMONT DRIVE SOMERSET N.J.	DATE: 30 OCT 15		MRX-489(SL) CUSTOMER CONNECTION			
	ACAD FN: MRX-489(SL) CC					
	SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. OF	REV.:	CHK.: <i>SK</i>