


OLI – OPTICAL LEVEL INDICATOR:
 INDICATOR IS GREEN WHEN PROPER
 LEVEL IS PRESENT. IT IS RED WHEN
 SIGNAL IS MISSING OR AT INCORRECT
 LEVEL.

CONTACT RX/TX:
 INDICATORS ARE GREEN WHEN CONTACTS
 ARE CLOSED, OFF WHEN CONTACTS ARE
 OPEN.

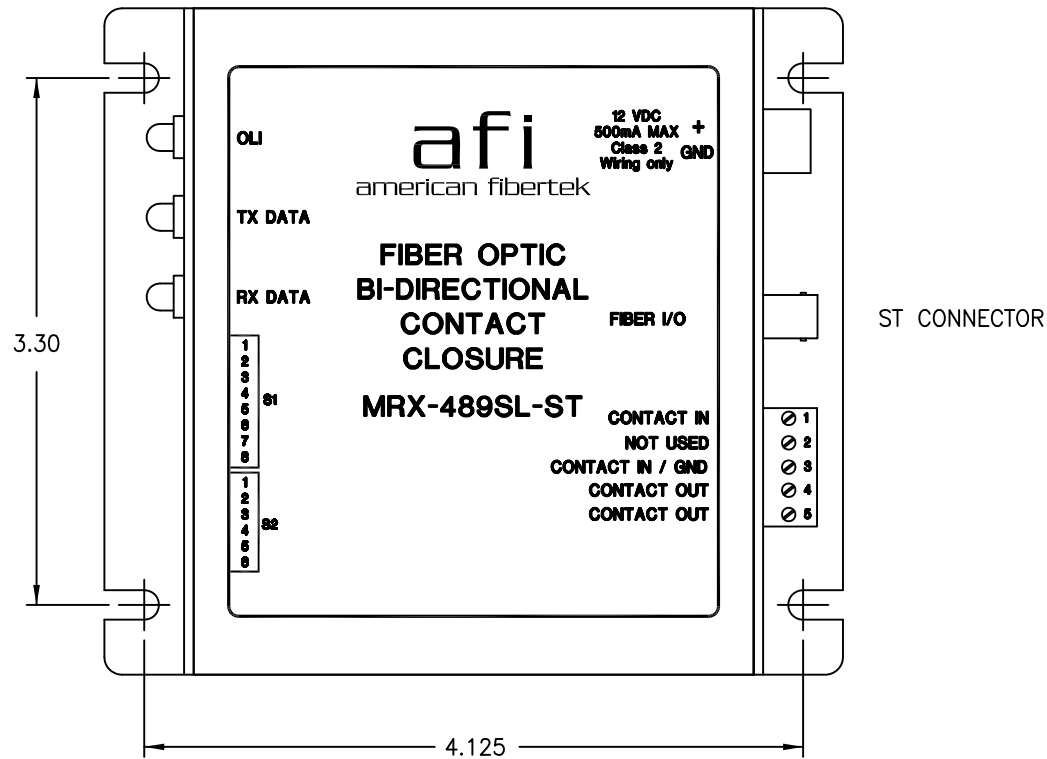

SWITCH S1 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
ON	OFF	ON	OFF	OFF	OFF	ON	ON	FACTORY SHIPPED

SWITCH S2 LEGEND								
1	2	3	4	5	6	7	8	ON=DOWN / OFF=UP
OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	FACTORY SHIPPED

 american fibertek 120 BELMONT DRIVE SOMERSET N.J.	DATE: 08 JAN 16		MRX-489SL-ST CUSTOMER CONNECTION			
	ACAD FN: MRX-489SL-ST CC					
	SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. OF	REV.:	CHK.: <i>SK</i>