

afi
american fibertek

**FIBER OPTIC
INTERCOM
TRANSCEIVER**

FIBER M S INTERCOM OLI 24 VAC CT
50 TO 60 Hz
400 mA MAX
Class 2 Wiring only





OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

3 1/4" 5 3/4"

6 1/4"

6 3/4"

MASTER VOLUME SPEAKER VOLUME

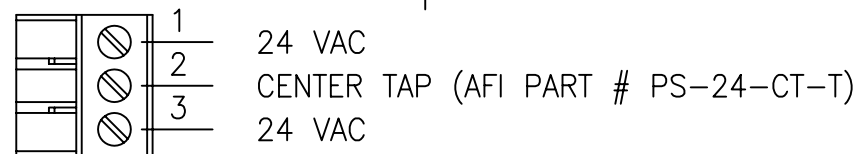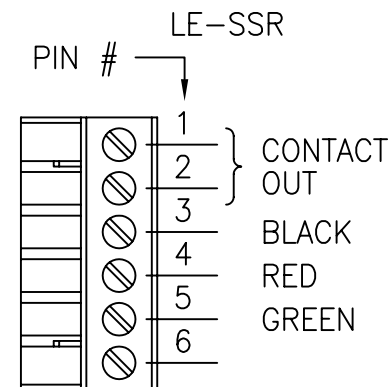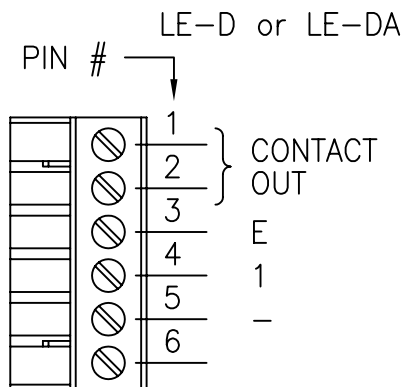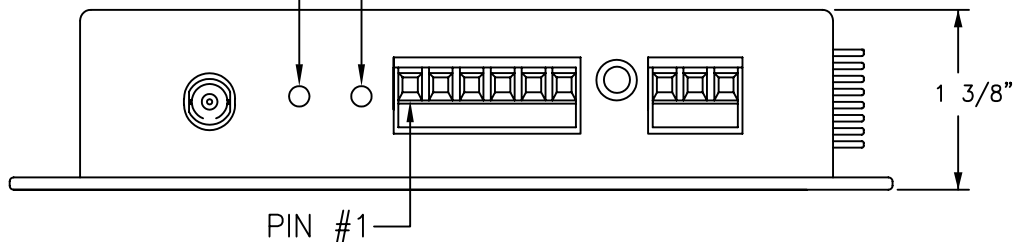

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

afi
american fibertek
120 BELMONT DRIVE SOMERSET N.J.

DATE: 04 MAR 10
ACAD FN.: MT-89A-L CC
SCALE: NONE DWG BY: BLB

MT-89A-L AIPHONE INTERCOM
STATION INTERFACE
CUSTOMER ASSEMBLY DRAWING

DWG. NO.: SH. 1 OF 1 REV.: CHK.: *JK*