

afi
american fibertek

**FIBER OPTIC
INTERCOM
TRANSCEIVER**

FIBER M S INTERCOM OLI 24 VAC CT
50 TO 60 Hz
400 mA MAX
Class 2 Wiring only


OLI - OPTICAL LEVEL INDICATOR:
INDICATOR IS GREEN WHEN PROPER
LEVEL IS PRESENT. IT IS RED WHEN
SIGNAL IS MISSING OR AT INCORRECT
LEVEL.

3 1/4" 5 3/4"



RECOMMENDED AUDIO WIRE
SHIELDED TWISTED PAIR #24AWG

PIN # MT-89D

FROM DUKANE
SUBSTATION 4A1480

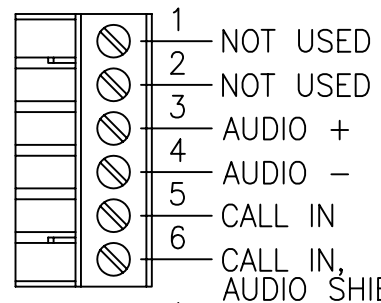

25V, 0.5W TAP(RED)
25V COMMON (BLACK)
BUTTON SWITCH CONTACT
BUTTON SWITCH CONTACT

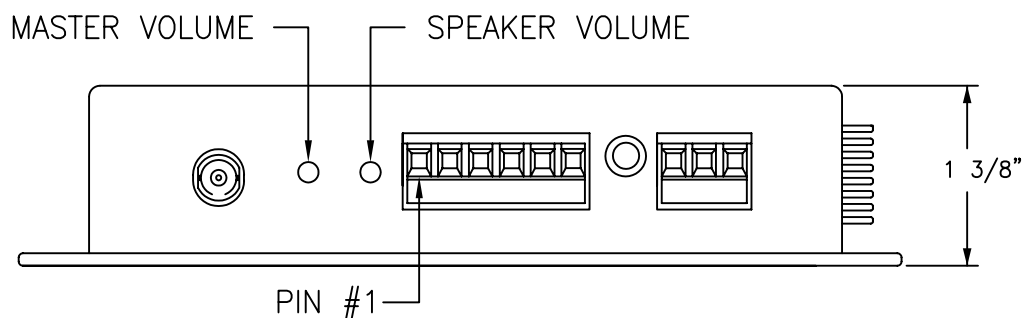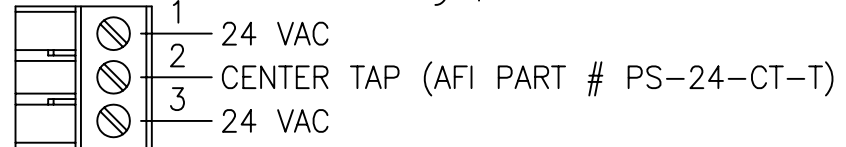

NOTE:
MOUNTING DIMENSIONS
3 1/4" x 6 1/4" O.C.

<p>afi american fibertek 120 BELMONT DRIVE SOMERSET N.J.</p>		DATE: 13 SEPT 07		<p>MT-89D DUKANE CUSTOMER ASSEMBLY DRAWING</p>	
		ACAD FN.: MT-89D CC			
SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. 1 OF 1	REV.:	CHK.: