
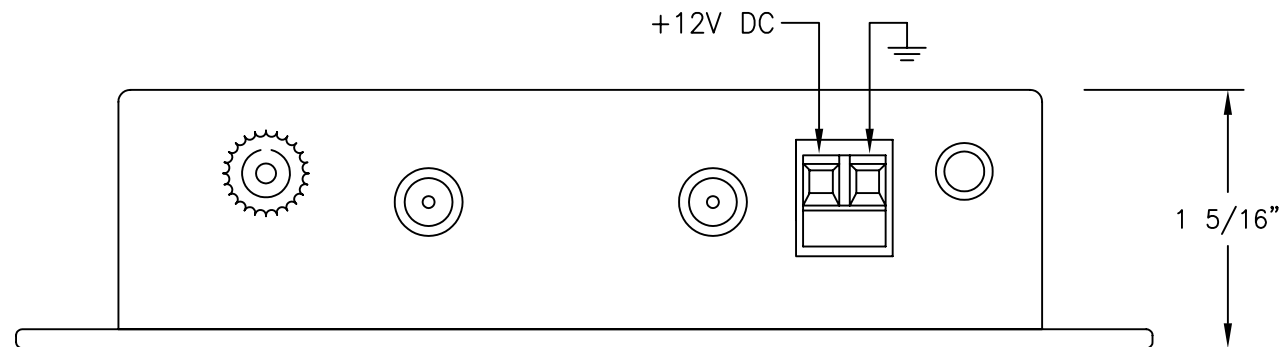


INSTALLATION NOTES:

THE PERFORMANCE OF THE 90SL LINK IS ENHANCED BY USING AN FC/APC OPTICAL CONNECTOR AT THE MR-90SL OPTICAL INPUT. THE RECOMMENDED MT/RT-90SL OPTICAL CONNECTOR IS AN FC/UPC.

AN FC/UPC TO FC/APC PATCHCORD IS PROVIDED FOR THIS PURPOSE.

CONNECT THE FC/APC CONNECTOR (END WITH GREEN BOOT) TO THE OPTICAL INPUT CONNECTION OF THE MR-90SL. CONNECT THE OTHER END OF THE PATCHCORD TO AN FC/UPC CONNECTOR USING THE FC ADAPTER PROVIDED

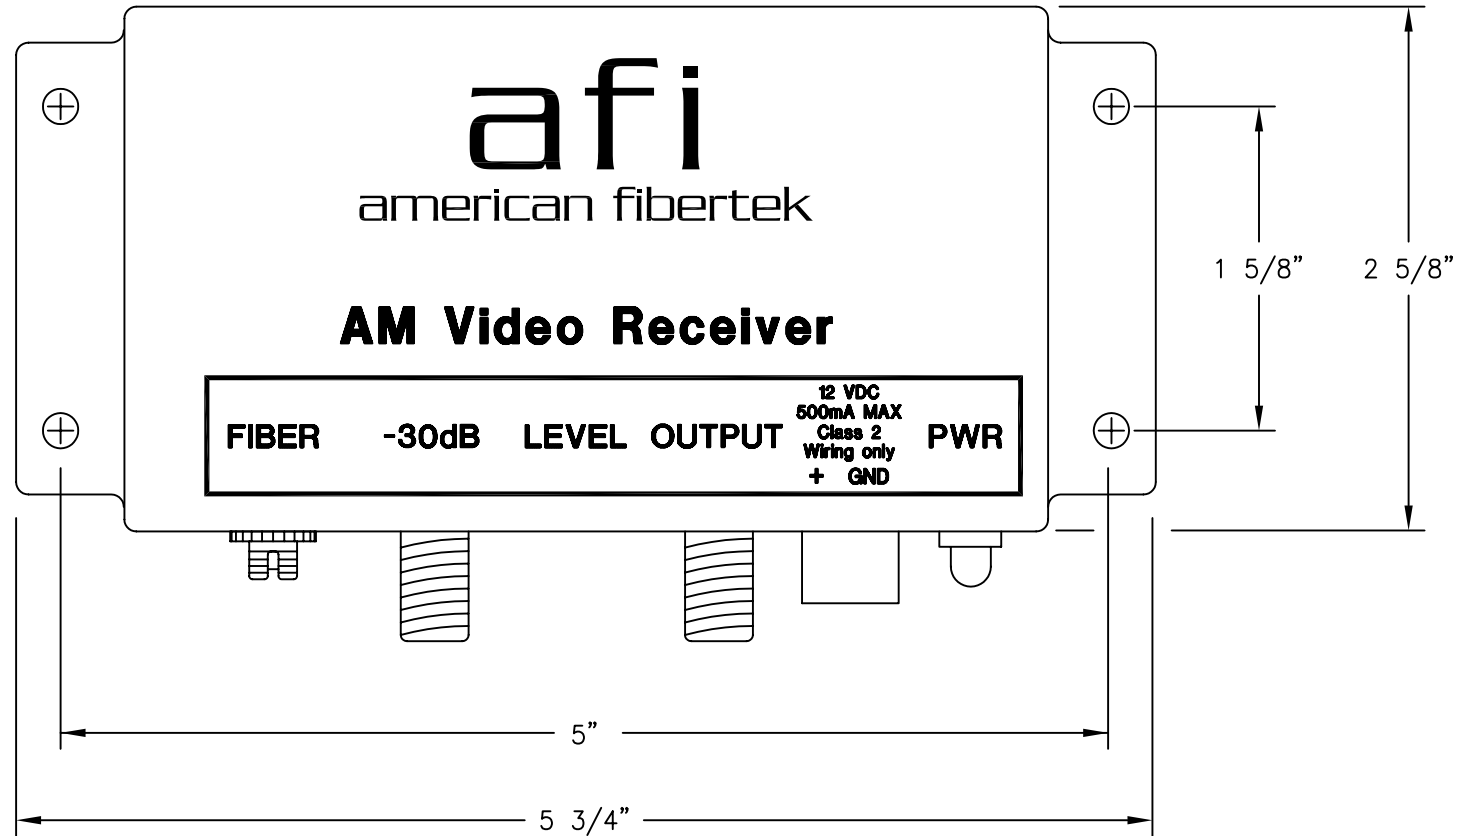

NOTE:  
MOUNTING DIMENSIONS  
1 5/8" X 5" O.C.

 120 BELMONT DRIVE SOMERSET N.J.	DATE: 27 MAR 08	MR-90SL CUSTOMER CONNECTION			
	ACAD FN.: MR-90SL CC				
SCALE:	DWG BY: BLB	DWG. NO.:	SH. OF	REV.: A	CHK.: 