


**SET UP:**

THE RECOMMENDED INPUT LEVEL IS +10dBmV PER RF CHANNEL. THE RF CHANNELS SHOULD BE EQUAL IN LEVEL. ADJUST THE RF LEVEL CONTROL FULLY CLOCKWISE. IF DISTORTION IS PRESENT IN ANY OF THE RF CHANNELS AT THE OUTPUT OF THE LINK, ADJUST THE RF LEVEL CONTROL COUNTER CLOCKWISE UNTIL THE RF CHANNELS HAVE CLEAR PICTURES.

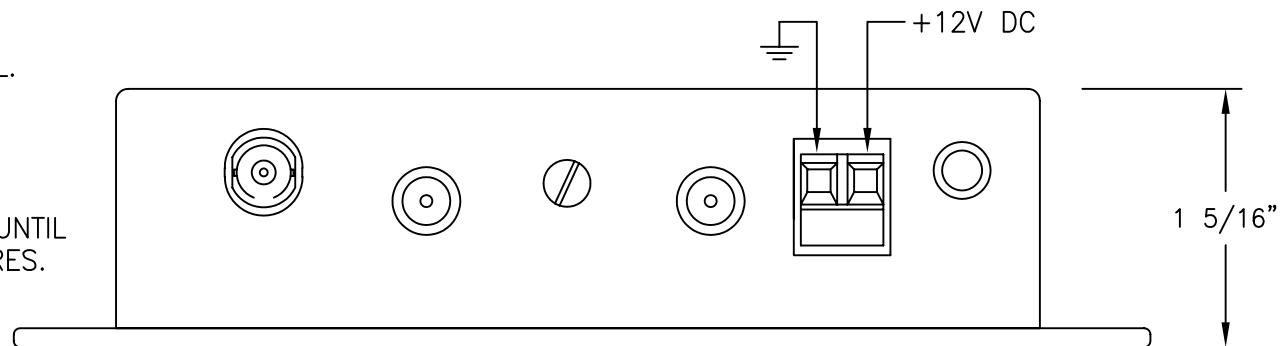

NOTE:  
MOUNTING DIMENSIONS  
1 5/8" X 5" O.C.

 american fibertek	DATE:	MT-90			
	ACAD FN.:	27 MAR 08	CUSTOMER CONNECTION		
120 BELMONT DRIVE SOMERSET N.J.		MT-90 CC			
	SCALE:	DWG BY:	DWG. NO.:	SH. OF	REV.:
		BLB			CHK.: