


12 VDC / 48 VDC INDICATORS:
 INDICATOR IS GREEN WHEN PROPER
 LEVEL IS PRESENT. IT IS OFF WHEN
 SIGNAL IS MISSING OR AT INCORRECT
 LEVEL.

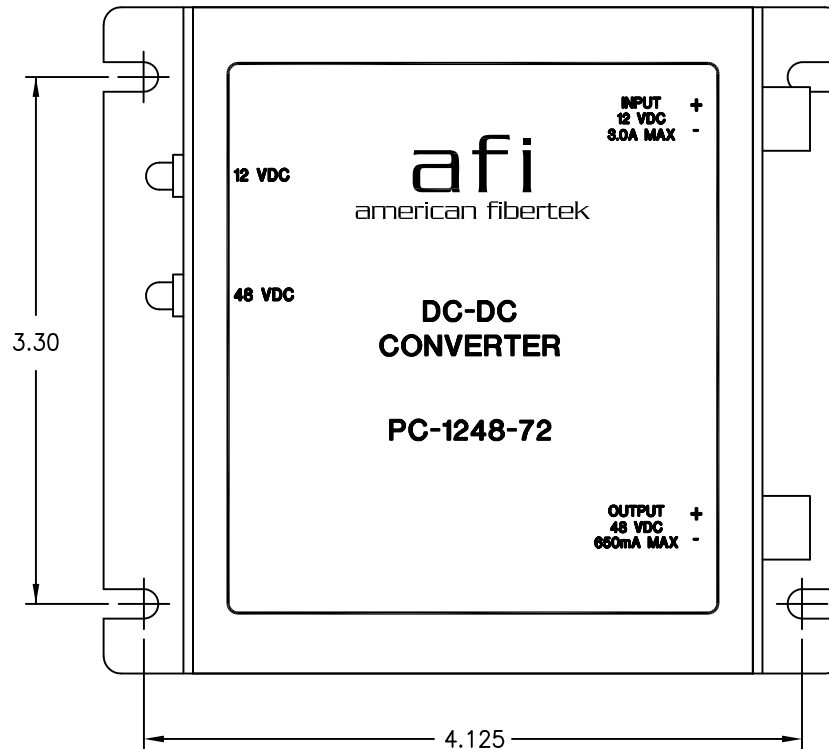

INPUT VOLTAGE:
 +12 VDC TO +24 VDC
 3.0A MAX

OUTPUT 48 VDC:
 CONNECTS TO AFI SERIES
 46-POE, 48-POE, 49-POE
 50-POE, 6p-POE PRODUCTS

INPUT VOLTAGE	+12 VDC TO +24 VDC
INPUT CURRENT	3.2 A MAX
OUTPUT VOLTAGE	+46 VDC TO +50 VDC
OUTPUT CURRENT	700 mA MAX
OUTPUT POWER	0 TO 30 WATTS MAX
LED INDICATORS	12 VDC, 48 VDC
OPERATING TEMPEATURE	-40C TO +70C

 american fibertek 120 BELMONT DRIVE SOMERSET N.J.	DATE: 07 DEC 12		PC-1248-72 CUSTOMER CONNECTION			
	ACAD FN: PC-1248-72 CC					
	SCALE: NONE	DWG BY: BLB	DWG. NO.:	SH. OF	REV.:	CHK.: