


SIDE VIEW

FRONT VIEW

SIDE VIEW

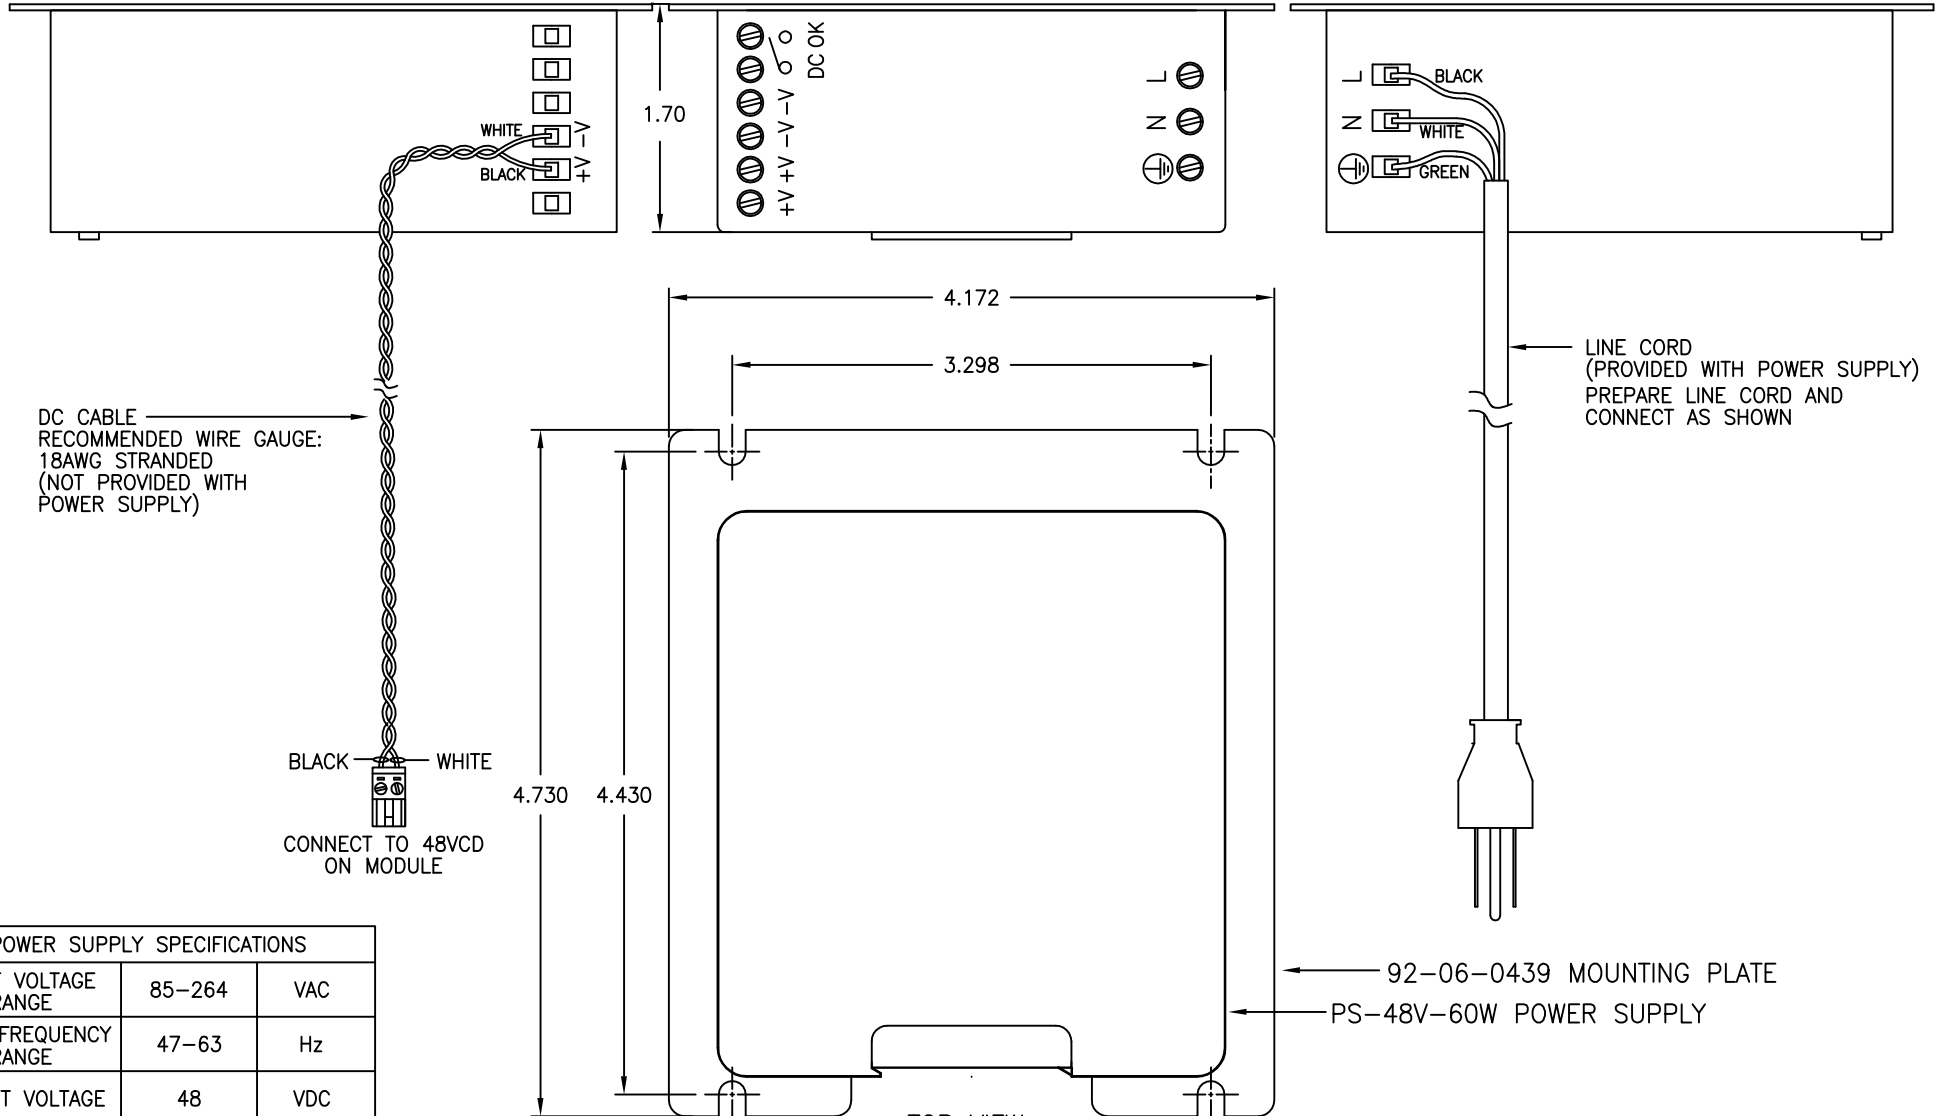

DC CABLE
RECOMMENDED WIRE GAUGE:
18AWG STRANDED
(NOT PROVIDED WITH
POWER SUPPLY)

BLACK WHITE
CONNECT TO 48VDC
ON MODULE

LINE CORD
(PROVIDED WITH POWER SUPPLY)
PREPARE LINE CORD AND
CONNECT AS SHOWN

92-06-0439 MOUNTING PLATE
PS-48V-60W POWER SUPPLY

TOP VIEW

POWER SUPPLY SPECIFICATIONS		
INPUT VOLTAGE RANGE	85-264	VAC
INPUT FREQUENCY RANGE	47-63	Hz
OUTPUT VOLTAGE	48	VDC
OUTPUT CURRENT RANGE	0-1.25	AMPS
OUTPUT POWER	60W @ 25C 30W @ 75C	WATTS
DC OK CONTACT OPENS WHEN OUTPUT DROPS BELOW 90%	30V / 1A	

 120 BELMONT DRIVE SOMERSET N.J.	DATE: 30 NOV 12	PS-4830-US PoE POWER SUPPLY ASSY		
	ACAD FN.: PS-4830-US CC	SCALE: NONE	DWG BY: JPK	DWG. NO.:
				SH. 1 OF 1
				REV.: CHK.: