


SIDE VIEW

FRONT VIEW

PARTIAL SIDE VIEW

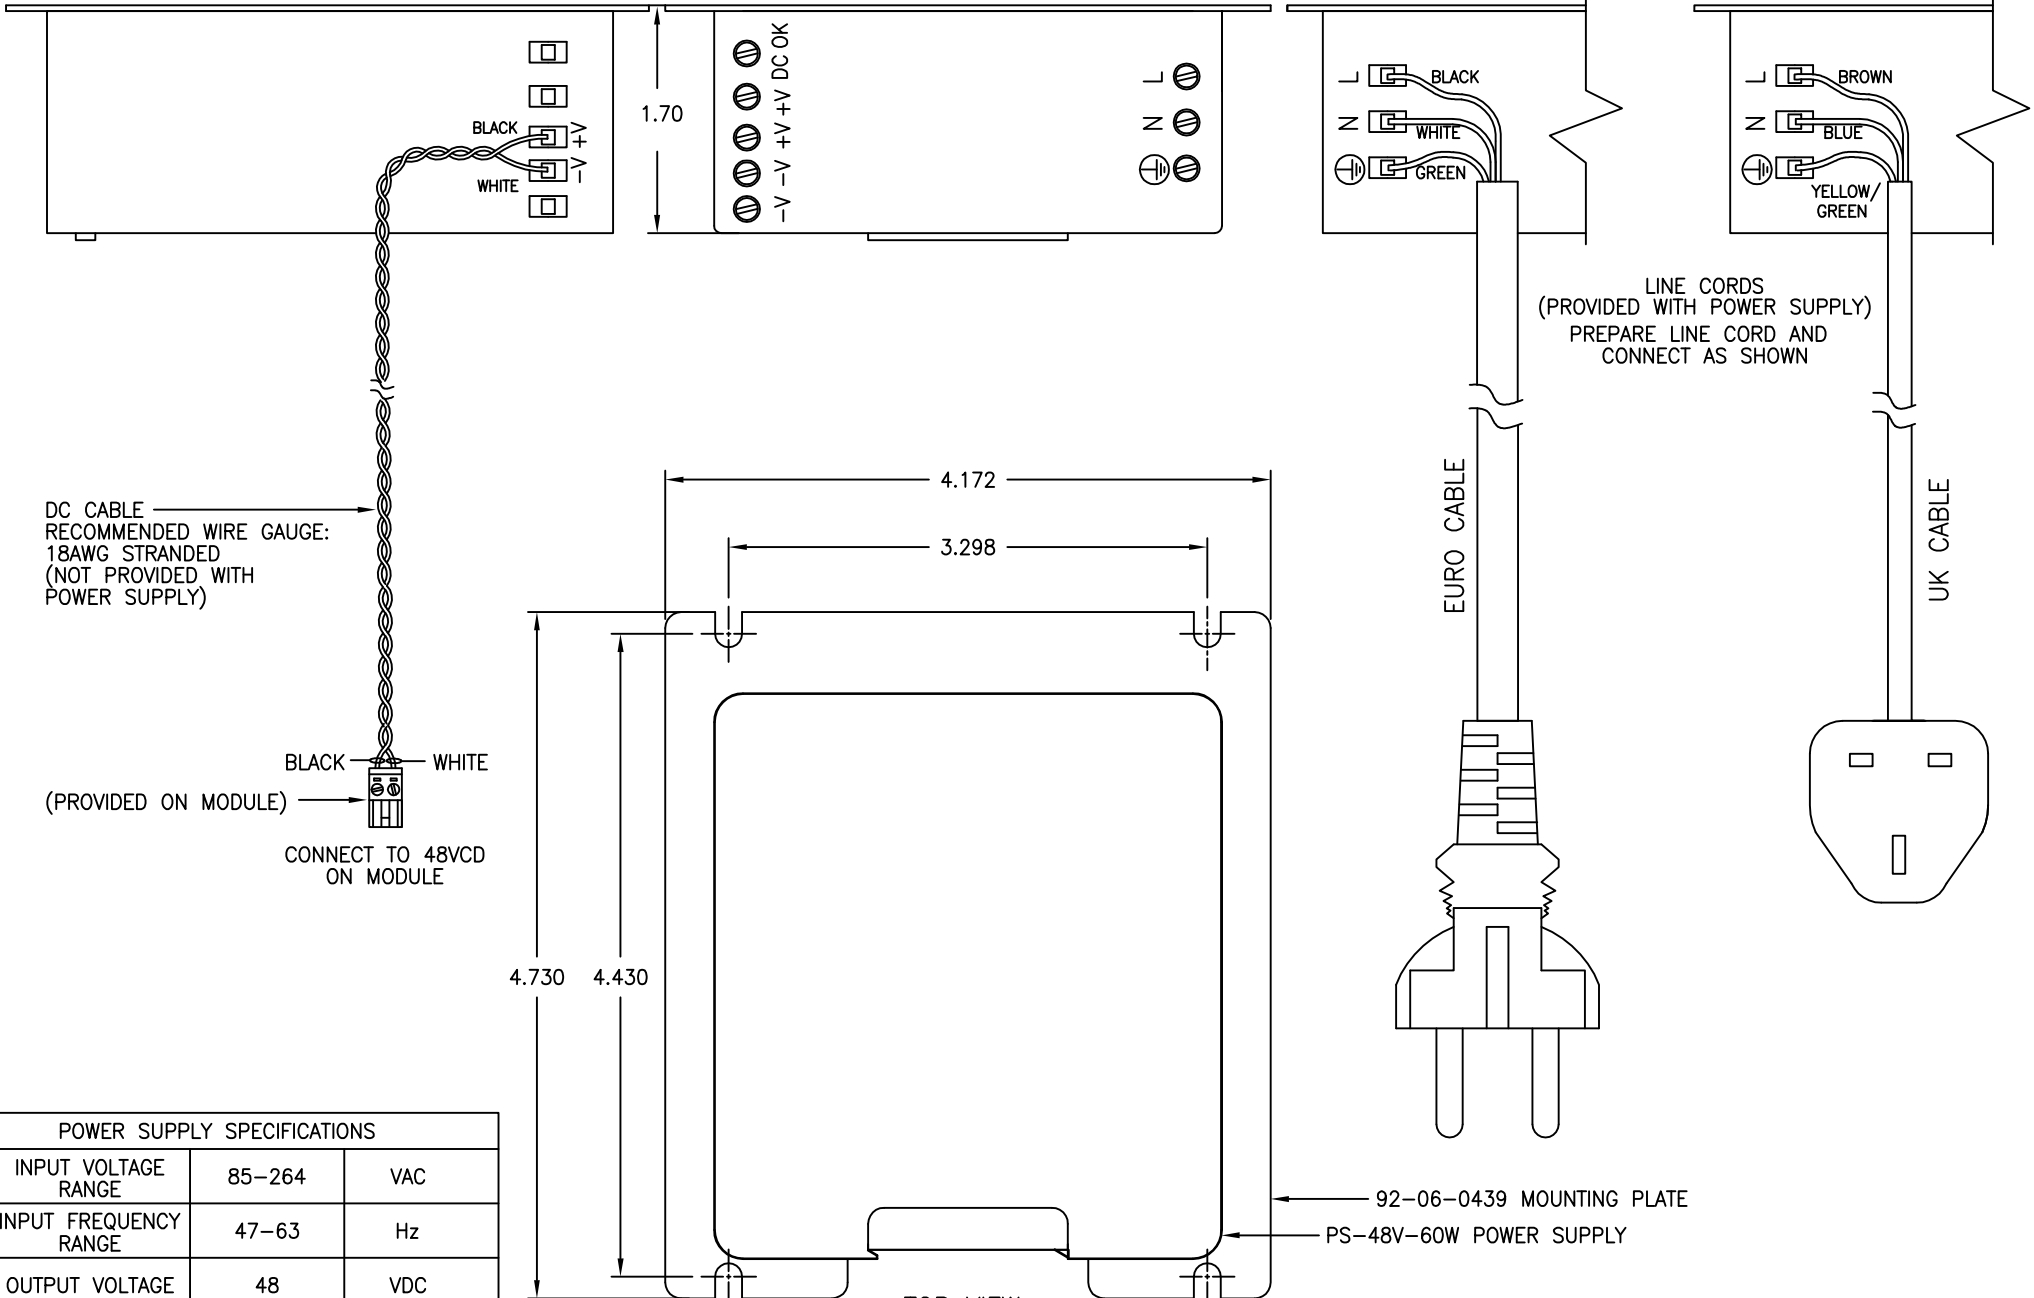

DC CABLE  
RECOMMENDED WIRE GAUGE:  
18AWG STRANDED  
(NOT PROVIDED WITH  
POWER SUPPLY)

BLACK WHITE  
(PROVIDED ON MODULE)  
CONNECT TO 48VDC  
ON MODULE

LINE CORDS  
(PROVIDED WITH POWER SUPPLY)  
PREPARE LINE CORD AND  
CONNECT AS SHOWN

POWER SUPPLY SPECIFICATIONS		
INPUT VOLTAGE RANGE	85-264	VAC
INPUT FREQUENCY RANGE	47-63	Hz
OUTPUT VOLTAGE	48	VDC
OUTPUT CURRENT RANGE	0-1.25	AMPS
OUTPUT POWER	60W	WATTS
DC OK VOLTS (RELATIVE TO V-)	24V DC OUT GOOD	0V NO DC OUTPUT

TOP VIEW

**afi**  
american fibertek  
120 BELMONT DRIVE SOMERSET N.J.

DATE:	07 MAR 13	PS-4860-CE PoE POWER SUPPLY ASSY	
ACAD FN.:	PS-4860-CE CC	SCALE:	NONE
DWG BY:	BLB	DWG NO.:	SH. 1 OF 1
REV.:		CHK.:	<i>SK</i>