
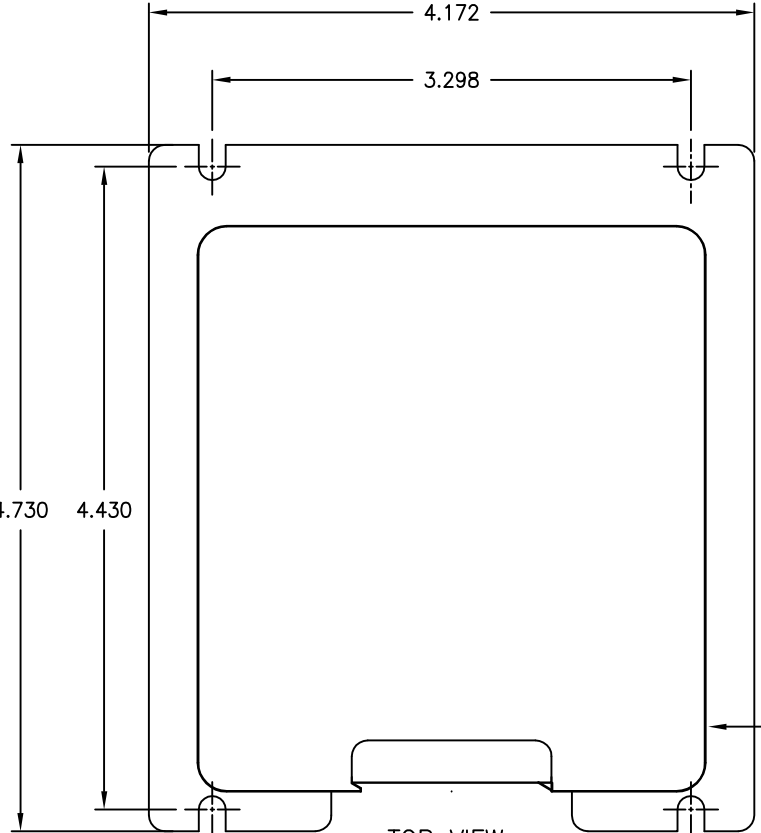


SIDE VIEW

FRONT VIEW

SIDE VIEW

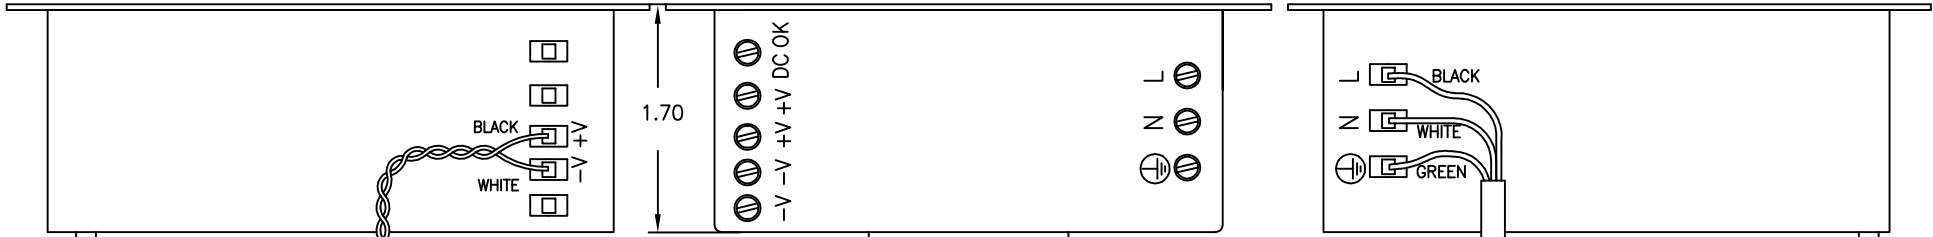

DC CABLE
RECOMMENDED WIRE GAUGE:
18AWG STRANDED
(NOT PROVIDED WITH
POWER SUPPLY)

BLACK WHITE
(PROVIDED ON MODULE)
CONNECT TO 48VDC
ON MODULE

LINE CORD
(PROVIDED WITH POWER SUPPLY)
PREPARE LINE CORD AND
CONNECT AS SHOWN

92-06-0439 MOUNTING PLATE
PS-48V-60W-1 POWER SUPPLY

TOP VIEW

POWER SUPPLY SPECIFICATIONS		
INPUT VOLTAGE RANGE	85-264	VAC
INPUT FREQUENCY RANGE	47-63	Hz
OUTPUT VOLTAGE	48	VDC
OUTPUT CURRENT RANGE	0-1.25	AMPS
OUTPUT POWER	60W	WATTS
DC OK VOLTS (RELATIVE TO V-)	24V DC OUT GOOD	0V NO DC OUPUT

120 BELMONT DRIVE SOMERSET N.J.

DATE: 08 FEB 13

ACAD FN.: PS-4860-US CC

SCALE: NONE DWG BY: JPK

PS-4860-US
PoE POWER SUPPLY ASSY

DWG. NO.: SH. 1 OF 1 REV.: CHK: *[Signature]*