
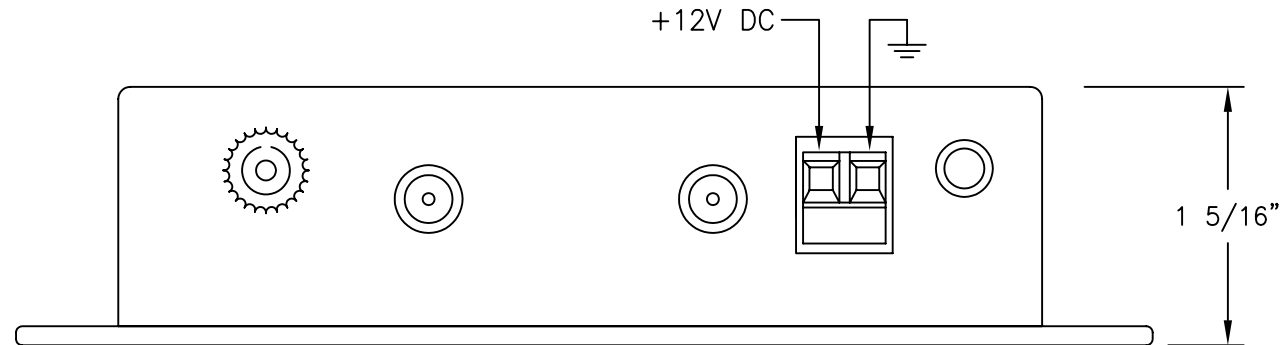


**INSTALLATION NOTES:**


THE SERIES 91SL LINK SPECIFIES FC/UPC OPTICAL CONNECTORS. HOWEVER, THE PERFORMANCE OF THE LINK IS IMPROVED BY USING USING AN FC/APC OPTICAL CONNECTOR AT THE MR-91SL INPUT.

AN FC/UPC TO FC/APC PATCHCORD AND FC/UPC COUPLER ARE PROVIDED FOR THIS PURPOSE.

CONNECT THE FC/APC CONNECTOR (END WITH GREEN BOOT) TO THE OPTICAL INPUT OF THE MR-91SL. CONNECT THE FC/UPC CONNECTOR TO THE SYSTEM FIBER USING THE THE FC/UPC COUPLER.

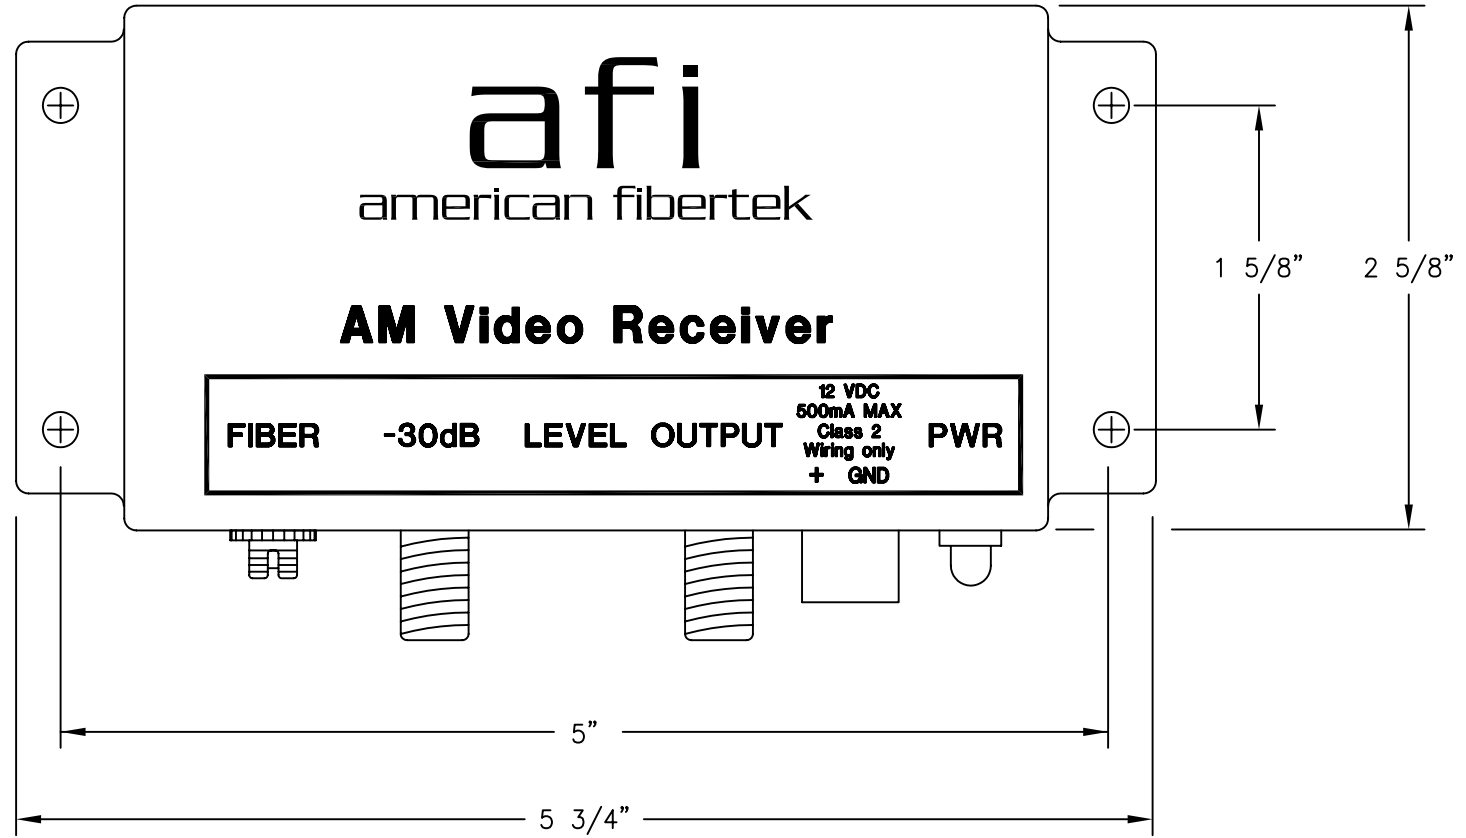

NOTE:  
MOUNTING DIMENSIONS  
1 5/8" X 5" O.C.

|   |                         |                                |        |            |             |
|---|-------------------------|--------------------------------|--------|------------|-------------|
| <br>american fibertek<br>120 BELMONT DRIVE SOMERSET N.J. | DATE:<br>27 MAR 08      | MR-91SL<br>CUSTOMER CONNECTION |        |            |             |
|   | ACAD FN.:<br>MR-91SL CC | DWG. NO.:                      | SH. OF | REV.:<br>A | CHK.:<br>JK |
|   | SCALE:                  | DWG. BY:<br>BLB                |        |            |             |